


| | |
|----------------------------------|---|
| Product code [White] | UT-PS141WH |
| Classification | Infrared Presence Sensor |
| Control chip made in | USA |
| Power source [V/AC] | 220-240 |
| Operating frequency [Hz] | 50...60 |
| Rated number of switching cycles | ≥ 100000 |
| Ambient light [Lux] | < 3-2000 (adjustable) |
| Time delay | min. 10sec ± 3sec max. 30min ± 2min |
| Rated load [W] | Incandescent lamps (cos φ=1): max. 2000 Flourescent lamps (cos φ=0,5): max. 1000 |
| Detection range [°] | 360 |
| Detection distance [m] | max. Ø20 (< 24°C) |
| Working temperature [°C] | -20...+40 |
| Working humidity [%RH] | < 93 |
| Power consumption [W] | approx. 0,5 |
| Installation height [m] | 2,2-6 |
| Detection moving speed [km/h] | 0,36-5,4 |
| IP rating | IP20 |
| Electric shock protection | Class II |
| Mounting | Recessed / Surface |
| UV-proof body | ✓ |



| Dimension [mm] | |
|----------------|-------|
| A | 111,5 |
| B | 65,2 |
| C | 55 |
| D | 60 |

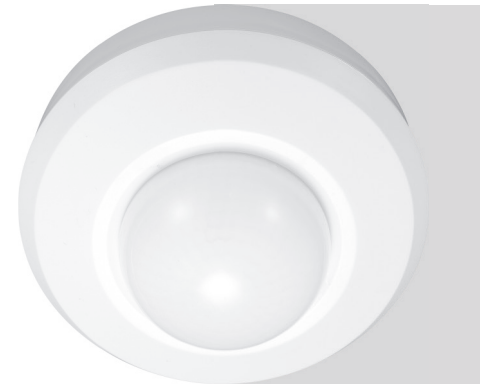